



DIN 228

- Materiál: legovaná ocel chrom-manganová
- Cementováno do hloubky 0,7mm
- Kaleno a přesně broušeno
- Tvrdost povrchů 58±2 HRC

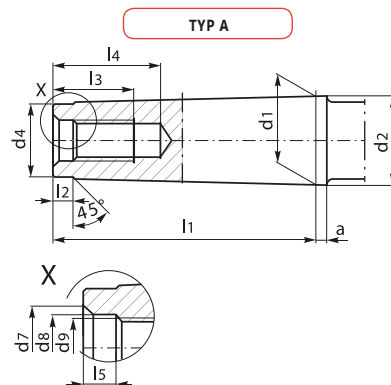

Kužel MK	a	b	d ₁	d ₂	d ₄	d ₆	d ₇	d ₈	d ₉
0	3	3.9	9,045	9,2	6	6	—	—	—
1	3,5	5.2	12,065	12,2	9	8,7	8,5	6,4	M6
2	5	6.3	17,780	18	14	13,5	13,2	10,5	M10
3	5	7.9	23,825	24,1	19	18,5	16	13	M12
4	6,5	11.9	31,267	31,6	25	24,5	21,5	17	M16
5	6,5	15.9	44,399	44,7	35,7	35,7	26	21	M20
6	8	19.0	63,348	63,8	51	51	32	25	M24
7	9,5	28.5	83,058	83,5	66	66,8	—	—	—


TYP B

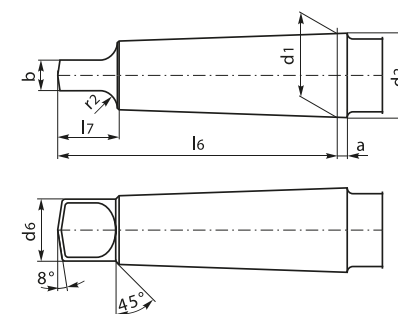

Kužel MK	l ₁	l ₂	l ₃	l ₄	l ₅	l ₆	l ₇	r ₂	a/2
0	50	4	—	—	—	56,5	10,5	4	1°29'27"
1	53,5	5	16	22	4	62	13,5	5	1°25'43"
2	64	5	24	31,5	5	75	16	6	1°25'50"
3	81	7	24	33,5	5,5	94	20	7	1°26'16"
4	102,5	9	32	42,5	8,2	117,5	24	8	1°29'15"
5	129,5	10	40	52,5	10	149,5	29	10	1°30'26"
6	182	16	47	61,5	11,5	210	40	13	1°29'36"
7	250,5	18	—	—	—	286	54	19	1°29'22"

7711

- Kleštinové upínače pro kleštiny ER (DIN 6499)
- Jiné rozměry na poptávku

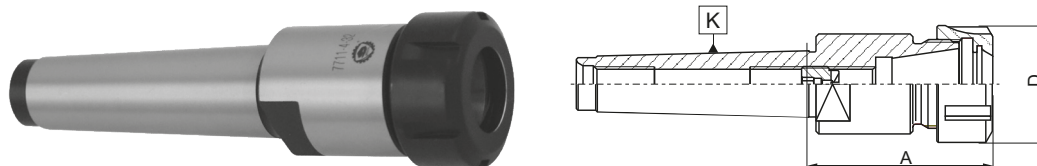

Kód výrobku	Kužel MK	Kleština	A	Rozsah upínání	D		
800002402	2	ER16	43,5	2-10	32	9833-16	M10x11LH
800002403	2	ER20	47,5	2-13	35	9833-20	M10x11LH
800005134	2	ER25	57,0	2-16	42	9833-25	M10x11LH
800002404	2	ER32	65,5	2-20	50	9833-32	M10x11LH
800002405	3	ER16	43,5	2-10	32	9833-16	M12x1,5x14LH
800002406	3	ER20	45,5	2-13	35	9833-20	M12x1,5x14LH
800002407	3	ER25	68,0	2-16	42	9833-25	M12x1,5x14LH
800002408	3	ER32	73,5	2-20	50	9833-32	M12x1,5x14LH
800005135	3	ER40	85,0	2-26	63	9833-40	M12x1,5x14LH
800002409	4	ER25	54,5	2-16	42	9833-25	M18x1,5x19LH
800002410	4	ER32	84,0	2-20	50	9833-32	M18x1,5x19LH
800003780	4	ER40	80,0	2-26	63	9833-40	M18x1,5x19LH
800002411	5	ER32	65,5	2-20	50	9833-32	M22x1,5x24LH
800002412	5	ER40	67,5	2-26	63	9833-40	M22x1,5x24LH