
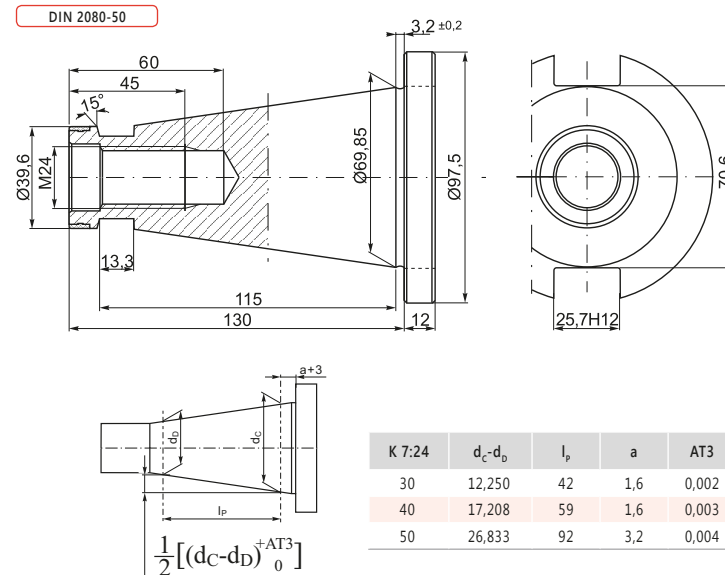



DIN 2080

- Materiál: legovaná ocel chrom-manganová
- Cementováno do hloubky 0,7mm
- Kaleno a přesně broušeno
- Tvrdost povrchů 58±2 HRC
- Tolerance úhlu kuželu AT3

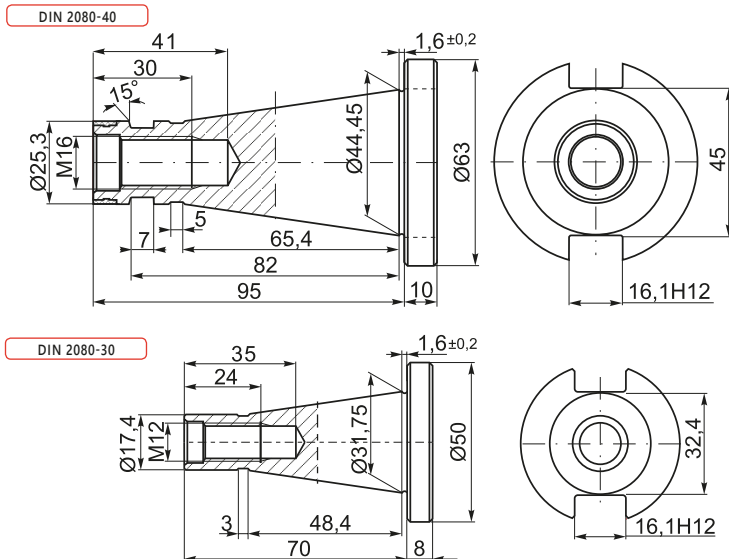

7616


- Kleštinové upínače pro kleštiny ER (DIN 6499)

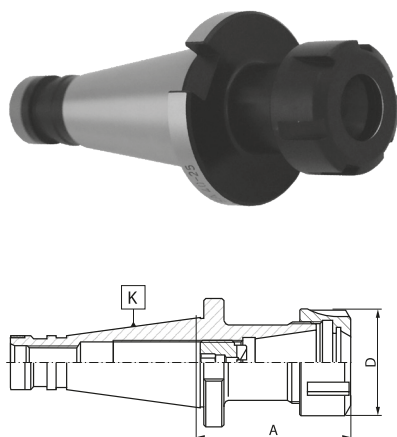

Kód výrobku	K 7:24	Kleština	A	Rozsah upínání	D		
800001754	30	ER16	50	2-10	32	9833-16	M10x11LH
800001755	30	ER32	50	2-20	50	9833-32	M18x1,5x19LH
800001756	40	ER25	60	2-16	42	9833-25	M18x1,5x19LH
800001757	40	ER32	60	2-20	50	9833-32	M22x1,5x24LH
800001758	40	ER32	130	2-20	50	9833-32	M22x1,5x24LH
800001759	40	ER40	60	2-26	63	9833-40	M28x1,5x30LH
800001760	50	ER32	70	2-20	50	9833-32	M22x1,5x24LH
800001761	50	ER32	130	2-20	50	9833-32	M22x1,5x24LH
800001762	50	ER40	70	2-26	63	9833-40	M28x1,5x30LH
800001763	50	ER40	130	2-26	63	9833-40	M28x1,5x30LH

7616-S

- Kleštinové upínače pro kleštiny ER (DIN 6499) prodloužené

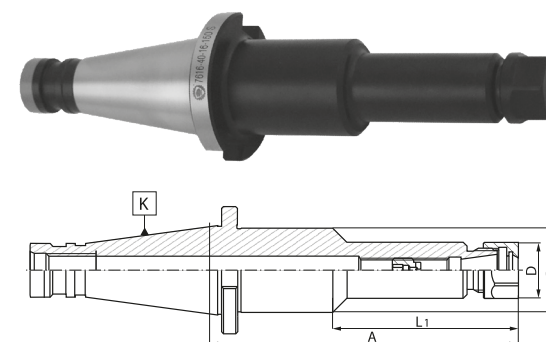

Kód výrobku	K 7:24	Kleština	A	Rozsah upínání	L ₁	D	D ₁		
800001764	40	ER16	100	2-10	-	28	-	9833-16D	M12x1,5x14LH
800001765	40	ER16	150	2-10	85	28	40	9833-16D	M12x1,5x14LH
800001766	50	ER16	100	2-10	-	28	-	9833-16D	M12x1,5x14LH
800001767	50	ER16	150	2-10	85	28	40	9833-16D	M12x1,5x14LH