

DIN 1835

- Materiál: legovaná ocel chrom-manganová
- Cementováno do hloubky 0,7mm
- Kaleno a přesně broušeno
- Tvrdost povrchů 58±2 HRC


DIN 1835-A

- Typ A - hladká stopka




DIN 1835-B

- Typ B - s jednou ploškou (Weldon)
- $d = 6 \div 20 \text{ mm}$




- Typ B - se dvěma ploškami (Weldon)
- $d = 25 \div 32 \text{ mm}$



d h6	l	b ₁	b ₂	h h ₁₁	e
6	36	4,2	-	5,1	18,0
8	36	5,5	-	6,9	18,0
10	40	7,0	-	8,5	20,0
12	45	8,0	-	10,4	22,5
14	45	8,0	-	12,7	22,5
16	48	10,0	-	14,2	24,0
18	48	10,0	-	16,2	24,0
20	50	11,0	-	18,2	25,0
25	56	12,0	17	23,0	32,0
32	60	14,0	19	30,0	35,0

7812

- Kleštinové upínače s hladkou stopkou pro kleštiny ER (DIN 6499)

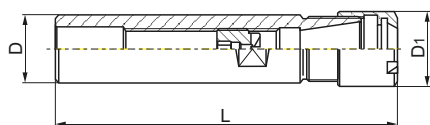

7812-SADA

- Kleštinové upínače pro kleštiny ER (DIN 6499) se sadou kleštin ve dřevěné kazetě



Kód výrobku	D	Kleštiny	L	Rozsah upínání	Počet kleštin v sadě
800002709	16	ER16	160	2-10	8
800002710	20	ER16	100	2-10	8
800002711	20	ER16	160	2-10	8

Kód výrobku	D	Kleštiny	L	Rozsah upínání	D ₁	Matice	Stavěcí šroub
800002706	16	ER16	160	2-10	22	9833-16S	M10x11LH
800002707	20	ER16	100	2-10	22	9833-16S	M12x1,5x14LH
800002708	20	ER16	160	2-10	22	9833-16S	M12x1,5x14LH

Dále dostupné možnosti:

Kleštiny	stopka D (od - do)	L (od do)	Rozsah upínání	D ₁	Matice
ER8 M	D6-D12	67-225	1-5	12	M8M
ER11 M	D6-D25	67-335	1-7	16	M11M
ER16 M	D10-D25	98-340	1-10	22	M16M
ER16	D16-D20	91-191	1-10	31	M16S
ER20 M	D16-D25	101-345	1-14	28	M20M
ER20	D20-D25	96-205	1-14	28	M20SE
ER25 M	D20-D25	106-346	1-20	35	M25M
ER25	D20-D40	106-210	1-20	42	M25S
ER32	D20-D50	110-210	2-22	50	M32S
ER40	D25-D60	120-220	3-30	63	M40S
ER50	D40-D60	225-235	6-40	78	M50S

Matice:



typ S




typ SE



typ M

5348

- Trny s válcovou stopkou pro vrtací sklířidla s kuzelem dle DIN 238



Kód výrobku	D	l	K ₁ DIN	L
800000756	8	35	B10	55.5
800000757	10	48	B12	72.5
800000758	10	50	B10	69.5
800000759	10	50	B12	74.5
800000760	10	50	B16	83.5
800000761	12	50	B16	83.5
800000762	12	60	B16	93.5
800000763	16	50	B16	81.0
800000764	16	70	B16	101.0
800000765	16	70	B18	110.0
800000766	20	30	B16	63.0
800000767	20	60	B12	87.0
800000768	20	60	B16	93.0
800000769	20	60	B18	100.0
800000770	25	75	B16	109.0
800000771	30	70	B16	106.0
800000772	30	70	B18	112.0