

1

2

3


4

5

6

7

C



■ Možnost nastavení hloubky upnutí "T" pomocí vyměnitelných materiálůvých dorazů.

■ Nejsou součástí dodávky a musí být objednány zvlášť

TVRDÉ ZAKUSOVACÍ ČELISTI • VNITŘNÍ

ZOUBKOVÁNÍ METRICKÉ 1,5 mm x 60°



Kód	Typ čelisti	N	B	H	T	G	b	Šrouby	kg / sada
398522666000	SWKB M160-12-06	12	30	47	20	M 6	20	M 10	1,3
398522667200	SWKB M160-12-07	12	30	47	20	M 6	20	M 10	1,1
398522668500	SWKB M160-12-08	12	30	47	20	M 6	20	M 10	1,0
398522669800	SWKB M160-12-09	12	35	47	20	M 6	20	M 10	1,1
398522670500	SWKB M160-12-10	12	40	47	20	M 6	20	M 10	1,3
398522671800	SWKB M200-14-01	14	35	53	25	M 6	25	M 12	2,0
398522672000	SWKB M200-14-02	14	35	53	25	M 6	25	M 12	1,6
398522673300	SWKB M200-14-03	14	40	53	25	M 6	25	M 12	1,6
398522674600	SWKB M200-14-04	14	40	53	25	M 6	25	M 12	1,6
398522675900	SWKB M200-14-16	14	40	53	25	M 6	25	M 12	1,8

Ø 160 - 200 mm




Dorazy materiálu

Strana 499



T-matice

Strana 488-497

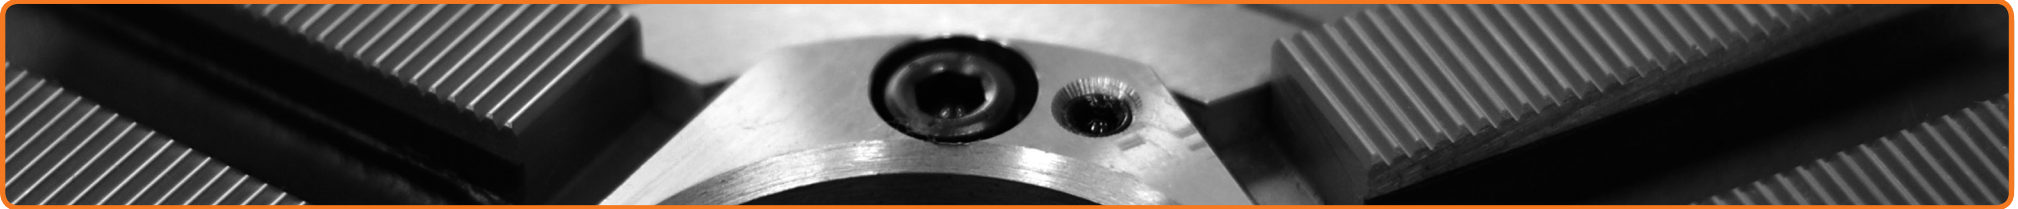


	SCHUNK			KITAGAWA			SMW-AUTOBLOK			HOWA		
	Rozsah upínání	Max. oběžný průměr	Typ sklíčidla	Rozsah upínání	Max. oběžný průměr	Typ sklíčidla	Rozsah upínání	Max. oběžný průměr	Typ sklíčidla	Rozsah upínání	Max. oběžný průměr	Typ sklíčidla
Ø 160 - 200 mm	31 - 50	170	ROTA NCK 165; ROTA NCK plus 165	31 - 52	172	B 206	33 - 65	185	AL-M 165	27 - 56	181	HO 7 MA 6
				31 - 52	172	HOH 6; HOH 206	29 - 58	178	AN-M 165	32 - 52	177	HO 22 M 6
				32 - 47	166	N 160; N 6	38 - 69	190	BB-M 175	27 - 52	177	HO 27 M 6
				36 - 54	174	BB 06; BB 206	28 - 58	178	BH-M 165			
							31 - 56	176	HFKN-M 165			
	42 - 65	170	ROTA NCK 165; ROTA NCK plus 165	42 - 67	172	B 206	49 - 81	185	AL-M 165	48 - 68	175	HO 22 M 6
				32 - 65	170	B 160; B 6	43 - 74	178	AN-M 165			
				42 - 67	172	HOH 6; HOH 206	54 - 85	190	BB-M 175			
				47 - 63	166	N 160; N 6	42 - 74	178	BH-M 165			
				51 - 69	174	BB 06; BB 206	46 - 72	176	HFKN-M 165			
	58 - 81	170	ROTA NCK 165; ROTA NCK plus 165	58 - 81	172	B 206	65 - 97	185	AL-M 165	56 - 88	178	HO 7 MA 6
				47 - 81	170	B 160; B 6	59 - 90	178	AN-M 165	64 - 84	173	HO 22 M 6
				58 - 83	172	HOH 6; HOH 206	70 - 101	190	BB-M 175	48 - 84	173	HO 27 M 6
				63 - 77	166	N 160; N 6	58 - 90	178	BH-M 165			
				67 - 85	174	BB 06; BB 206	62 - 88	176	HFKN-M 165			
	72 - 95	170	ROTA NCK 165; ROTA NCK plus 165	72 - 97	172	B 206	79 - 111	185	AL-M 165	78 - 98	174	HO 22 M 6
				61 - 95	170	B 160; B 6	73 - 104	178	AN-M 165			
				72 - 97	172	HOH 6; HOH 206	84 - 115	190	BB-M 175			
				77 - 93	166	N 160; N 6	72 - 104	178	BH-M 165			
				81 - 99	174	BB 06; BB 206	76 - 102	176	HFKN-M 165			
	88 - 111	170	ROTA NCK 165; ROTA NCK plus 165	88 - 113	172	B 206	95 - 127	185	AL-M 165	81 - 118	178	HO 7 MA 6
				77 - 111	170	B 160; B 6	89 - 120	178	AN-M 165	94 - 118	173	HO 22 M 6
				88 - 113	172	HOH 6; HOH 206	100 - 131	190	BB-M 175	71 - 114	173	HO 27 M 6
				93 - 107	166	N 160; N 6	88 - 120	178	BH-M 165			
				97 - 115	174	BB 06; BB 206	92 - 118	176	HFKN-M 165			
	35 - 63	209	ROTA NCK 210; ROTA NCK plus 210	35 - 64	211	B 208	45 - 79	225	AL-M 210	34 - 72	211	HO 7 MA 8
				33 - 61	208	B 200; B 8	36 - 69	216	AN-M 210	34 - 78	211	HO 23 M 8
				35 - 64	211	HOH 8; HOH 208	41 - 71	218	BB-M 210			
				42 - 68	212	N 200; N 8	33 - 70	217	BH-M 210			
				42 - 64	211	BB 08; BB 208	42 - 81	228	HFKN-M 210			
	62 - 90	209	ROTA NCK 210; ROTA NCK plus 210	62 - 92	211	B 208	73 - 107	225	AL-M 210	62 - 100	218	HO 7 MA 8
				47 - 89	208	B 200; B 8	63 - 97	216	AN-M 210	62 - 106	218	HO 23 M 8
				62 - 92	211	HOH 8; HOH 208	68 - 99	218	BB-M 210			
				68 - 96	216	N 200; N 8	54 - 98	217	BH-M 210			
				70 - 92	211	BB 08; BB 208	69 - 109	228	HFKN-M 210			
	92 - 121	209	ROTA NCK 210; ROTA NCK plus 210	92 - 122	211	B 208	103 - 137	225	AL-M 210	92 - 130	218	HO 7 MA 8
				77 - 119	208	B 200; B 8	94 - 127	216	AN-M 210	92 - 136	223	HO 23 M 8
				92 - 122	211	HOH 8; HOH 208	98 - 129	218	BB-M 210			
				98 - 128	217	N 200; N 8	84 - 128	217	BH-M 210			
				100 - 122	211	BB 08; BB 208	100 - 139	228	HFKN-M 210			
	122 - 151	209	ROTA NCK 210; ROTA NCK plus 210	122 - 153	211	B 208	133 - 167	225	AL-M 210	122 - 160	218	HO 7 MA 8
				113 - 150	208	B 200; B 8	124 - 158	216	AN-M 210	122 - 166	223	HO 23 M 8
				122 - 153	211	HOH 8; HOH 208	128 - 160	218	BB-M 210			
				128 - 153	212	N 200; N 8	114 - 159	217	BH-M 210			
				131 - 153	211	BB 08; BB 208	130 - 170	228	HFKN-M 210			
	144 - 173	229	ROTA NCK 210; ROTA NCK plus 210	144 - 173	229	B 208				150 - 180	238	HO 7 MA 8
				135 - 170	226	B 200; B 8				150 - 187	245	HO 23 M 8
				144 - 173	229	HOH 8; HOH 208						
				153 - 173	230	N 200; N 8						
				153 - 174	229	BB 08; BB 208						



TVRDÉ ZAKUSOVACÍ ČELISTI - VNITŘNÍ

ZOUBKOVÁNÍ METRICKÉ 1,5 mm x 60°



Možnost nastavení hloubky upnutí "T" pomocí vyměnitelných materiálových dorazů.


Nejsou součástí dodávky a musí být objednány zvlášť

Kód	Typ čelisti	N	B	H	T	G	b	Šrouby	kg / sada
398522676100	SWKB M200-16-05	16	35	53	25	M 6	25	M 12	1,8
398522677400	SWKB M200-16-06	16	35	53	25	M 6	25	M 12	1,6
398522678700	SWKB M200-16-07	16	40	53	25	M 6	25	M 12	1,4
398522679000	SWKB M200-16-08	16	40	53	25	M 6	25	M 12	1,4
398522680700	SWKB M250-16-01	16	40	58	25	M 6	30	M 12	3,0
398522681000	SWKB M250-16-02	16	40	58	25	M 6	30	M 12	2,4
398522682200	SWKB M250-16-03	16	40	58	25	M 6	30	M 12	2,1
398522683500	SWKB M250-16-04	16	40	58	25	M 6	30	M 12	2,0
398522684800	SWKB M250-16-15	16	40	58	25	M 6	30	M 12	2,7
398522685000	SWKB M250-18-09	18	40	58	25	M 6	30	M 14	2,7
398522686300	SWKB M250-18-10	18	40	58	25	M 6	30	M 14	2,1
398522687600	SWKB M250-18-11	18	45	58	25	M 6	30	M 14	1,9
398522688900	SWKB M250-18-12	18	45	58	25	M 6	30	M 14	2,3
398522689100	SWKB M315-18-01	18	50	65	25	M 8	30	M 14	5,0
398522690900	SWKB M315-18-02	18	50	65	25	M 8	30	M 14	3,7
398522691100	SWKB M315-18-03	18	50	65	25	M 8	30	M 14	3,3
398522692400	SWKB M315-18-04	18	50	65	25	M 8	30	M 14	4,6

Ø 200 - 315 mm

Dorazy materiálu Strana 499

T-matice Strana 488-497

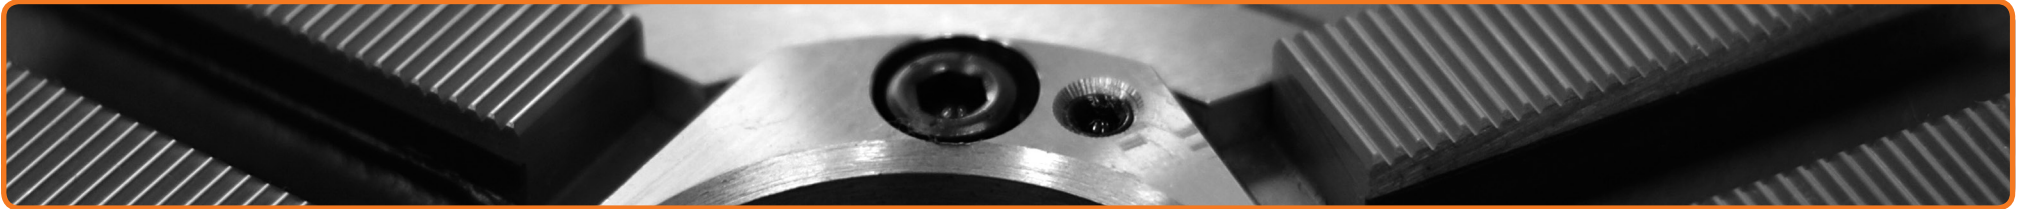


SCHUNK			KITAGAWA			SMW-AUTOBLOK			HOWA		
Rozsah upínání	Max. oběžný průměr	Typ sklíčidla	Rozsah upínání	Max. oběžný průměr	Typ sklíčidla	Rozsah upínání	Max. oběžný průměr	Typ sklíčidla	Rozsah upínání	Max. oběžný průměr	Typ sklíčidla
Ø 200 - 315 mm									38 - 70	214	HO 22 M 8
									30 - 68	214	HO 27 M 8
									66 - 98	214	HO 22 M 8
									48 - 96	214	HO 27 M 8
									96 - 128	218	HO 22 M 8
									78 - 126	213	HO 27 M 8
									126 - 158	218	HO 22 M 8
									108 - 155	213	HO 27 M 8
			43 - 81	258	ROTA NCK 250; ROTA NCK plus 250	43 - 84	260	B 210	55 - 93	269	AL-M 250
						40 - 81	258	B 250; B 10	43 - 81	258	AN-M 250
						38 - 79	255	HOH 10 K; HOH 250	52 - 81	258	BB-M 250
						37 - 78	255	N 250; N 10	42 - 80	257	BH-M 250
						48 - 74	251	BB 10; BB 210	40 - 81	258	HFKN-M 260
			84 - 123	258	ROTA NCK 250; ROTA NCK plus 250	84 - 128	260	B 210	97 - 135	269	AL-M 250
						76 - 123	258	B 250; B 10	85 - 123	258	AN-M 250
						79 - 123	255	HOH 10 K; HOH 250	94 - 123	258	BB-M 250
						78 - 122	257	N 250; N 10	83 - 122	257	BH-M 250
						90 - 116	251	BB 10; BB 210	76 - 123	258	HFKN-M 260
			128 - 167	262	ROTA NCK 250; ROTA NCK plus 250	128 - 173	264	B 210	141 - 179	273	AL-M 250
						120 - 167	262	B 250; B 10	128 - 167	262	AN-M 250
						123 - 168	259	HOH 10 K; HOH 250	138 - 167	262	BB-M 250
						122 - 167	263	N 250; N 10	127 - 166	261	BH-M 250
						134 - 160	255	BB 10; BB 210	119 - 167	262	HFKN-M 260
			173 - 212	278	ROTA NCK 250; ROTA NCK plus 250	173 - 214	280	B 210	176 - 224	289	AL-M 250
						165 - 212	278	B 250; B 10	173 - 213	278	AN-M 250
						168 - 209	275	HOH 10 K; HOH 250	183 - 213	278	BB-M 250
						167 - 208	274	N 250; N 10	172 - 212	277	BH-M 250
						179 - 205	271	BB 10; BB 210	164 - 213	278	HFKN-M 260
			202 - 260	322	ROTA NCK 250; ROTA NCK plus 250	208 - 247	310	B 210	208 - 258	320	AL-M 250
						203 - 242	305	B 250; B 10	208 - 248	310	AN-M 250
						203 - 242	305	HOH 10 K; HOH 250	218 - 248	310	BB-M 250
						202 - 242	304	N 250; N 10	207 - 247	309	BH-M 250
						214 - 241	303	BB 10; BB 210	207 - 266	328	HFKN-M 260
									38 - 88	262	HO 22 M 10
									38 - 90	264	HO 27 M 10
									80 - 130	262	HO 22 M 10
									76 - 132	264	HO 27 M 10
									118 - 168	265	HO 22 M 10
									120 - 176	268	HO 27 M 10
									169 - 219	286	HO 22 M 10
									165 - 221	286	HO 27 M 10
						45 - 108	320	B 300; B 12			
						45 - 110	322	HOH 12 K; HOH 300			
						42 - 116	328	N 300; N 12			
						93 - 168	334	B 300; B 12			
						99 - 170	336	HOH 12 K; HOH 300			
						102 - 176	342	N 300; N 12			
						158 - 234	325	B 300; B 12			
						163 - 236	327	HOH 12 K; HOH 300			
						166 - 242	333	N 300; N 12			
						227 - 299	370	B 300; B 12			
						228 - 301	372	HOH 12 K; HOH 300			
						231 - 307	378	N 300; N 12			



TVRDÉ ZAKUSOVACÍ ČELISTI - VNITŘNÍ

ZOUBKOVÁNÍ METRICKÉ 1,5 mm x 60°



Možnost nastavení hloubky upnutí "T" pomocí vyměnitelných materiálových dorazů.

Nejsou součástí dodávky a musí být objednány zvlášť

Ø 315 - 400 mm

Kód	Typ čelisti	N	B	H	T	G	b	Šrouby	kg / sada
398522693700	SWKB M315-21-05	21	50	65	25	M 8	30	M 16	5,0
398522694000	SWKB M315-21-06	21	50	65	25	M 8	30	M 16	3,9
398522695200	SWKB M315-21-07	21	50	65	25	M 8	30	M 16	3,4
398522696500	SWKB M315-21-08	21	50	65	25	M 8	30	M 16	4,5
398522697800	SWKB M400-22-01	22	60	85	33	M 8	43	M 20	10,6
398522698000	SWKB M400-22-02	22	60	85	33	M 8	43	M 20	9,2
398522699300	SWKB M400-22-03	22	60	85	33	M 8	43	M 20	6,5
398522700300	SWKB M400-22-04	22	60	85	33	M 8	43	M 20	7,0
398522701600	SWKB M400-22-05	22	60	85	33	M 8	43	M 20	8,2
398522702900	SWKB M400-22-06	22	60	85	33	M 8	43	M 20	9,5




Dorazy materiálu

Strana 499



T-matice

Strana 488-497

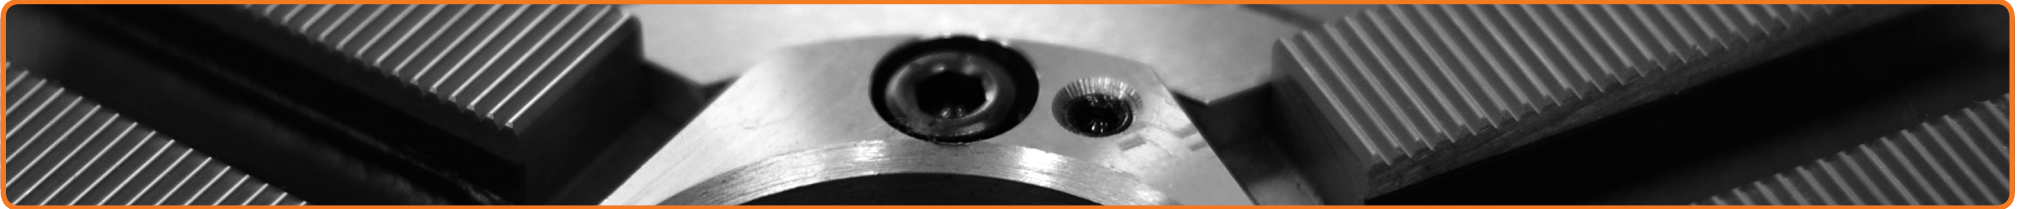

SCHUNK			KITAGAWA			SMW-AUTOBLOK									
Rozsah upínání	Max. oběžný průměr	Typ sklíčidla	Rozsah upínání	Max. oběžný průměr	Typ sklíčidla	Rozsah upínání	Max. oběžný průměr	Typ sklíčidla							
Ø 315 - 400 mm	48 - 109	321	ROTA NCK 315; ROTA NCK plus 315	45 - 111	323	B 212	57 - 139	349	AL-M 315						
				59 - 120	332	BB 212	45 - 125	336	AN-M 315						
							85 - 124	335	BB-M 315						
							54 - 125	336	BH-M 315						
							70 - 137	348	HFKN-M 315						
							117 - 199	363	AL-M 315						
							100 - 184	350	AN-M 315						
							144 - 183	349	BB-M 315						
							114 - 184	350	BH-M 315						
							130 - 196	362	HFKN-M 315						
							182 - 264	399	AL-M 315						
							165 - 250	341	AN-M 315						
	173 - 235	326	ROTA NCK 315; ROTA NCK plus 315	173 - 238	328	B 212	210 - 249	340	BB-M 315						
							179 - 250	341	BH-M 315						
							195 - 262	353	HFKN-M 315						
							247 - 315	385	AL-M 315						
	238 - 300	371	ROTA NCK 315; ROTA NCK plus 315	238 - 302	373	B 212	230 - 316	386	AN-M 315						
							275 - 315	385	BB-M 315						
							244 - 316	386	BH-M 315						
							260 - 315	385	HFKN-M 315						
							169 - 133	414	ALM 400						
							159 - 123	404	ANM 400						
							50 - 107	390	B 380; B 15; HOH 15 K	126 - 190	420	ALM 400			
							50 - 105	388	HOH 380; HOH 15						
	47 - 97	381	B 215	116 - 180	410	ANM 400									
	49 - 167	451	B 18												
	96 - 160	394	B 380; B 15												
										HOH 380; HOH 15	186 - 250	420	ALM 400		
				106 - 166	396	HOH 15 K				176 - 240				410	ANM 400
				90 - 154	386	B 215									
				105 - 225	457	B 18									
							156 - 220	394	B 380; B 15		307 - 371	457	ALM 400		
							158 - 221	392	HOH 380; HOH 15	297 - 361				447	ANM 400
							166 - 226	396	HOH 15 K						
							148 - 214	386	B 215						
							165 - 285	457	B 18		367 - 400	478	ALM 400		
							216 - 280	415	B 380; B 15	357 - 400				478	ANM 400
							218 - 280	412	HOH 380; HOH 15						
							226 - 286	417	HOH 15 K						
							209 - 276	407	B 215						
225 - 346							478	B 18							
276 - 340							431	B 380; B 15							
278 - 340							428	HOH 380; HOH 15							
						286 - 346	433	HOH 15 K							
						268 - 336	423	B 215							
						285 - 407	494	B 18							
						336 - 400	483	B 380; B 15							
						338 - 400	480	HOH 380; HOH 15							
						346 - 400	485	HOH 15 K							
						328 - 396	475	B 215							
						345 - 467	546	B 18							